

G3-534/36 SHORT STACK (BUILD YOUR OWN) VINEYARD SPRAYER



13.5L ANS Turf
Tire Option


Leaf Guard
Option



Option



Option

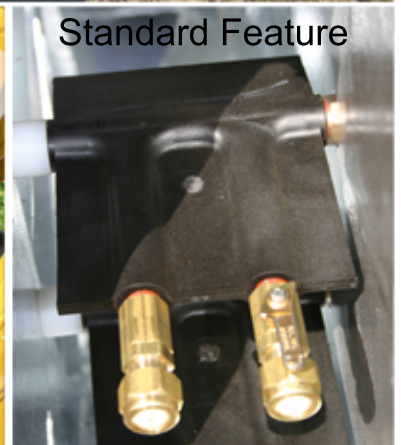

Standard Feature

2" fill front tank w/camlock

Comet APS-141 & 166 Pump Upgrade

Adjustable Air Vanes

Davis & Davis Distributors
507 E. Dinuba Avenue • Reedley, Ca 93654
(Ph)559-638-6546 • (Fax)559-638-9262
Visit us: www.airofan.com • Contact us: info@airofan.com



G3-534/36 SHORT STACK PTO DRIVE SPRAYER

STANDARD FEATURES

- 500 Gallon 304 stainless steel tank
- 26 GPM / 600 PSI Comet® (APS-101) diaphragm pump
- 34" diameter, 8-blade axial flow steel fan
- 2 speed gearbox with neutral
- Heavy duty constant velocity PTO shaft
- Tank drive shaft w/ rundown clutch
- 1" 304 stainless steel mechanical agitation
- Cable type remote control
- 304 stainless steel strainers
- 12.5Lx16.1 ribbed implement tires
- Heavy duty hubs and spindles
- Galvanized fan housing
- Composite nylon adjustable air vanes w/specialty valves
- Teejet® stainless steel nozzles

OPTIONS

- 600 Gallon Tank (634, 636, & 638 models)
- 2-Point, and DK turning hitches
- Comet® APS-141 & 166 diaphragm pump upgrades
- 100 GPM / 145 PSI Myers® 2-stage centrifugal pump
- Tree targeting and flow monitoring systems!
- Hydraulic and electric control valves
- Stainless steel fill connections (2" & 3")
- Tire upgrades (14L, 13.5L ANS, 16.5L, & 21.5L ribbed)
- Fan upgrades (36" & 38")
- Rear leaf guard

SPECIFICATIONS

Length.....14'3"

Width.....76"

Height.....62" to 68"

Weight.....2,225 lbs.

Air velocity...130 mph (approx.)

PTO Horse Power Requirements...65-100



DK turning plate




Spraying



DK turning hitch



Hydraulic Option



Electric Option



Visit our website: www.airofan.com