

SE-30/32 400V PTO POWERED VINEYARD SPRAYER



Standard Feature



Option



Option

Adjustable Air Vanes

Dual Hydraulic Spray Valves

Leaf Guard

Davis & Davis Distributors
507 E. Dinuba Avenue • Reedley, Ca 93654
(Ph)559-638-6546 • (Fax)559-638-9262
Visit us: www.airofan.com • Contact us: info@airofan.com



SE-30/32 400 “VOLUTE TOWER”

PTO DRIVE SPRAYER

STANDARD FEATURES

- 400 Gallon 304 stainless steel tank
- 26 GPM / 600 PSI Comet® diaphragm pump
- 30" diameter, 6-blade axial flow steel fan
- 2 speed gearbox with neutral
- Heavy duty constant velocity PTO shaft
- Tank drive shaft w/ rundown clutch
- 1" 304 stainless steel mechanical agitation
- Cable type remote control
- 304 stainless steel strainers (fill, suction, delivery)
- Teejet® stainless steel nozzles
- Composite nylon adjustable air vanes
- 9.50x15" ribbed implement tires
- Galvanized fan housing
- Vineyard volute tower

OPTIONS

- TeeJet® ceramic nozzles
- Hydraulic and electric control valves
- 2" and 3" Stainless steel fill connections
- Rear leaf guard
- Tire and wheel exchange options

SPECIFICATIONS

Length.....13'4"

Width.....52"

Height.....55" (top of tank) 75" (top of tower)

Weight.....1,340 lbs.

Air Velocity...120 MPH

PTO Horse Power Requirements...30-60

**32" FAN UPGRADE
OPTION!**

Turning Hitch Options



Road Towing




Road Towing



Operation



Operation

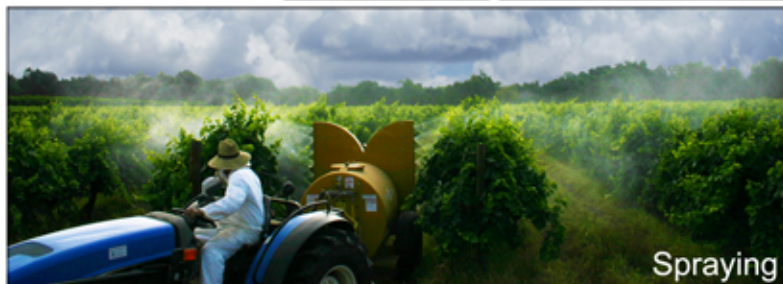

Spraying



2" Fill
Option



Swivel Hitch
Option

Visit our website: www.airofan.com