

SJ-300 "SLIM JIM" PTO POWERED ORCHARD SPRAYER



2-Point Turning
Hitch Option


Leaf Guard Option



Option



Option

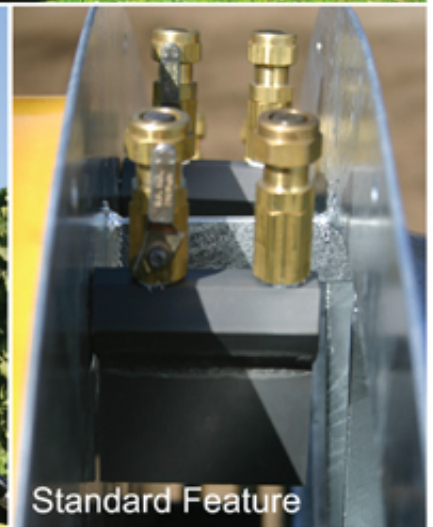

Standard Feature

2" Fill Front of Tank

Dual Hydraulic Spray Valves

Adjustable Air Vanes

Davis & Davis Distributors
507 E. Dinuba Avenue • Reedley, Ca 93654
(Ph)559-638-6546 • (Fax)559-638-9262
Visit us: www.airofan.com • Contact us: info@airofan.com



SJ-300 “SLIM JIM”

PTO DRIVE SPRAYER

STANDARD FEATURES

- 300 Gallon 304 stainless steel tank
- 26 GPM / 600 PSI Comet® diaphragm pump
- 30" diameter, 6-blade axial flow steel fan
- 2 speed gearbox with neutral
- Heavy duty constant velocity PTO shaft
- Tank drive shaft w/ rundown clutch
- 1" 304 stainless steel mechanical agitation
- Cable type remote control
- 304 stainless steel strainers (fill, suction, delivery)
- 7.60x15" 8 ply ribbed implement tires
- Heavy duty hubs and spindles
- Galvanized fan housing
- TeeJet® stainless steel nozzles
- Hard anodized aluminum vanes w/specialty valves

OPTIONS

- Hydraulic and electric control valves
- 2" and 3" Stainless steel fill connections
- Rear leaf guard
- DK turning & 2-Point turning hitches

SPECIFICATIONS

Length.....13'4"
Width.....52"
Height.....50" (top of tank)
Weight.....1,840 lbs.
Air Velocity...120 MPH
PTO Horse Power Requirements...30-60

Visit our website: www.airofan.com

Electric Spray Valve Option



Swivel Hitch Option

